

AR-327-E

Metal Access Control (with LCD)



Metal Solid, **Hard** Security

- Ingress Protection : IP56
- Indicators: 6 LED and 1 beeper
- Weatherproof design, can be used in any environment
- Metal Housing, have the fashion and the safety design
- Illuminated Touch-Panel design for easy operation at any dark site
- Patented Relay design can avoid the door opened by any vibration or mis-trigger



AR-327-E


Metal Access Control (with LCD)

Specification

Optional frequency: 125kHz/13.56MHz/Dual Band (125kHz & 13.56MHz)

Frequency	125kHz	13.56MHz	Real Time Clock	Yes
Standard	·EM Standard	·ISO14443A ·NFC (card simulation)	Digital Input	2 Egress(R.T.E.) / 2 Door contact
	Customization ·HID Prox	·ISO15693 ·DESFire ·FeliCa™ ·ISO7816-4	Customization ·HID Prox ·HID iClass	Indicator
Reading Range	3-7 cm	1-3 cm	Keypad Material	Illuminated Touch-Panel
Power consumption	<5W		Operation Mode	Stand-Alone / Networking
Communication	RS-485/9600 bps(N,8,1)		Time Zone	63
Ethernet	10/100M Base T Module(Optional)		Transistor Output	Arming LED / Alarm / Duress WG Lock Relay/Security trigger signal
Serial Port	UART X 2 (TTL 4800~115200)		Relay Output	Alarm Relay/ Lock Relay
Power Supply	10-24VDC		LCD Panel	128*64 (4 Lines messages, 16 Characters each line)
Operating Temperature	-20 °C to +65 °C		Lift Control	64 Floors, 16,000 Users
Lock Relay Time	ON/OFF, 0.1-600 Sec.		Color	Chrome
Alarm Time	Toggle, 1-600 Sec.		Housing Material	Zinc Alloy
User Capacity	16,000 Option:32,000/65,000		By Order	AR-MDL-721V (Voice Module)
Event log	32,000		Dimension(mm)	140(L)X92(W)X40(H)
External Reader	1 Wiegand Port		Weight(g)	430±10
Anti-pass-back	Yes			

Dimension (mm)

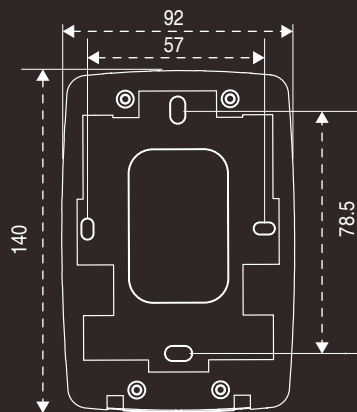

Access Control



Waterproof



Anti-vandalism

